


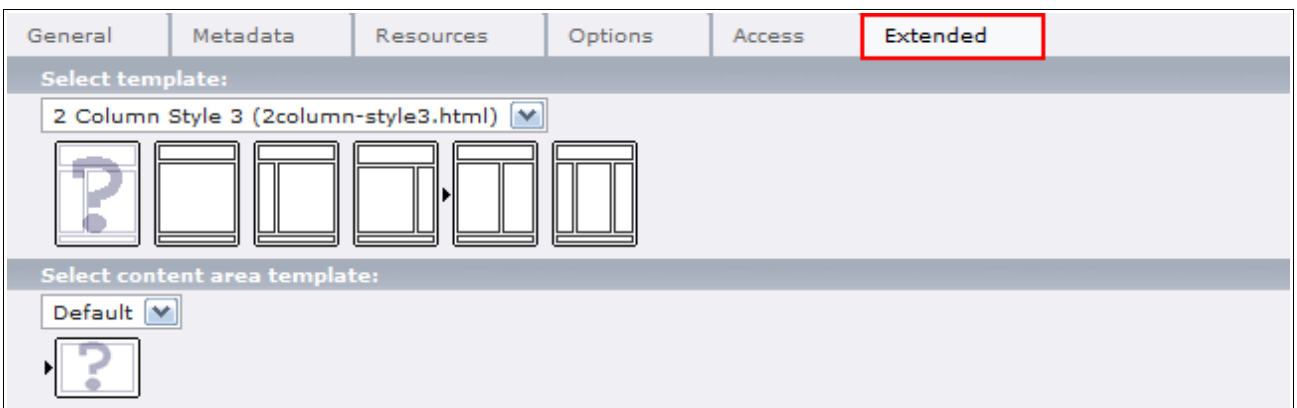


# Page TypoScript configuration (TSconfig)

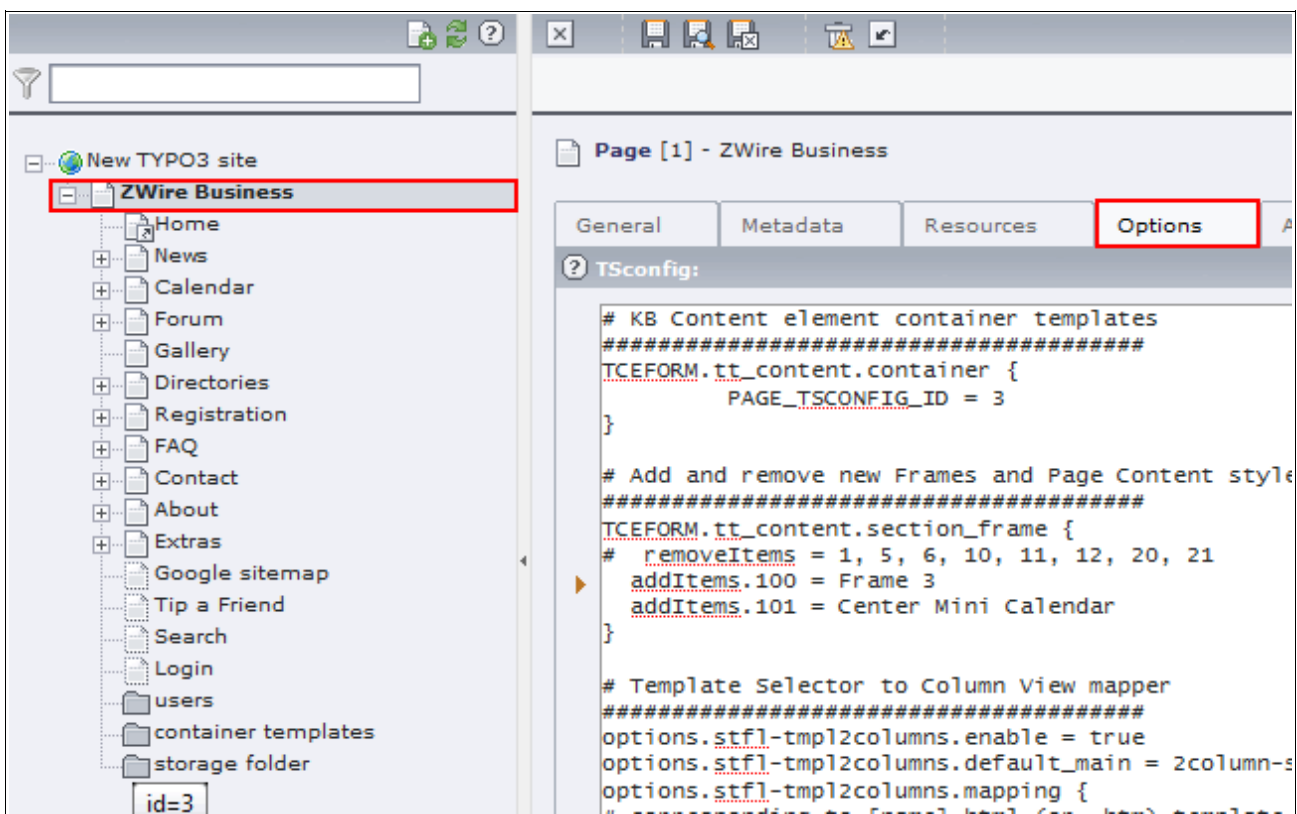

The Root Page contains TypoScript in the TSconfig field responsible for module configuration settings. These include the Page ID where KB Content element container templates are stored and options used for the Template Selector to Column View mapper and htmlArea RTE.

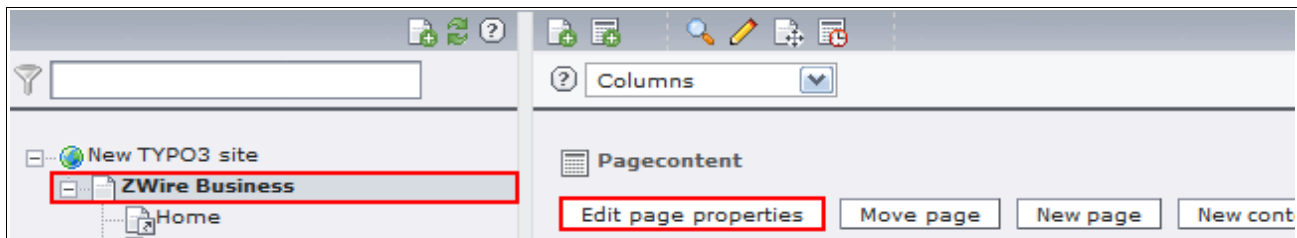

## Tsconfig code:

```
# KB Content element container templates
#####
TCEFORM.tt_content.container {
    PAGE_TSCONFIG_ID = 3
}

# Add and remove new Frames and Page Content styles
#####
TCEFORM.tt_content.section_frame {
# removeItems = 1, 5, 6, 10, 11, 12, 20, 21
    addItems.100 = Frame 3
    addItems.101 = Center Mini Calendar
}

# Template Selector to Column View mapper
#####
options.stfl-tmpl2columns.enable = true
options.stfl-tmpl2columns.default_main = 2column-style1
options.stfl-tmpl2columns.mapping {
# corresponding to [name].html (or .htm) template file

# 1column.html
1column = 0

# 2column-style1.html
2column-style1 = 1,0

# 2column-style2.html
2column-style2 = 0,2

# 2column-style3.html
2column-style3 = 0,2

# 3column.html
3column = 1,0,2
}
```

```
# MLC/GDR 20080505 enable for rtehtmlarea
#####
```

```
RTE {
```

```
  colors {  
    color1 {  
      name = green  
      value = #709600  
    }  
    color2 {  
      name = Orange  
      value = #FF6600  
    }  
  }  
}
```

```
  default {  
    colors = color1, color2  
  
    disableColorPicker = 1  
    disableSelectColor = 0  
    contentCSS =  
    allowTags (  
      a  
      , abbr  
      , acronym  
      , address  
      , b  
      , blockquote  
      , br  
      , caption  
      , center  
      , cite  
      , code  
      , div  
      , em  
      , font  
      , h1  
      , h2  
      , h3  
      , h4  
      , h5  
      , h6  
      , hr  
      , i  
      , img  
      , li  
      , link  
      , ol  
      , p  
      , pre  
      , q  
      , sfield  
      , span  
      , strike  
      , strong  
      , sub  
      , sup  
      , table
```

```
    , tbody
    , td
    , tfoot
    , th
    , thead
    , tr
    , tt
    , u
    , ul
)
allowTagsOutside (
  a
  , abbr
  , acronym
  , address
  , b
  , blockquote
  , br
  , caption
  , center
  , cite
  , code
  , div
  , em
  , font
  , h1
  , h2
  , h3
  , h4
  , h5
  , h6
  , hr
  , i
  , img
  , li
  , link
  , ol
  , p
  , pre
  , q
  , sffield
  , span
  , strike
  , strong
  , sub
  , sup
  , table
  , tt
  , u
  , ul
)
```

```
# Markup options (htmlArea RTE only)
enableWordClean = 1
removeTrailingBR = 0
removeComments = 1
removeTags =
removeTagsAndContents =
ignoreMainStyleOverride = 1
```

useCSS = 1

# Show all applicable class selectors available in the style sheet file (htmlArea RTE only)  
showTagFreeClasses = 1

# Match these items to "TCEFORM.tt\_content.header\_layout.removeItems" list  
# below  
hidePStyleItems = address

```
hideButtons (  
    leftorright  
    , righttoleft  
    , textindicator  
    , emoticon  
    , fontsize  
    , cut  
    , copy  
    , paste  
    , undo  
    , redo  
    , table  
    , spellcheck  
    , about  
  
    , fontstyle  
    , blockstyle  
    , superscript  
    , subscript  
    , strikethrough  
  
    , tableproperties  
    , toggleborders  
    , rowproperties  
    , rowinsertabove  
    , rowinsertunder  
    , rowdelete  
    , rowsplit  
    , columninsertbefore  
    , columninsertafter  
    , columndelete  
    , columnsplit  
    , cellproperties  
    , cellinsertbefore  
    , cellinsertafter  
    , celldelete  
    , cellsplit  
    , cellmerge  
)
```

```
toolbarOrder (  
    cut  
    , copy  
    , paste  
    , undo  
    , redo  
    , image  
    , line  
    , link
```

```

, table
, bar
, spellcheck
, chMode
, bar

, removeformat
, formatblock
, blockstyle
, textcolor
, bold
, italic
, underline
, bar
, superscript
, subscript
, strikethrough
, bar
, left
, center
, right
, justifyfull
, bar

, unorderedlist
, orderedlist
, outdent
, indent

, tableproperties
, toggleborders
, rowproperties
, rowinsertabove
, rowinsertunder
, rowdelete
, rowsplit
, columninsertbefore
, columninsertafter
, columndelete
, columnsplit
, cellproperties
, cellinsertbefore
, cellinsertafter
, celldelete
, cellsplit
, cellmerge

, bar
, about
)

showButtons = *

disablePCexamples = 1

proc {
  remapParagraphTag =
  dontConvBRtoParagraph = 1
  keepPDIVattribs = align,class,style,id,xml:lang

```

```

allowTags < RTE.default.allowTags
allowTagsOutside < RTE.default.allowTagsOutside
allowedClasses =
removeTags < RTE.default.removeTags
removeTagsAndContents < RTE.default.removeTagsAndContents

entryHTMLparser_db {
    keepNonMatchedTags = 1
    xhtml_cleaning = 1
    keepPDIVattribs = < RTE.default.proc.keepPDIVattribs
    allowTags < RTE.default.allowTags
    allowTagsOutside < RTE.default.allowTagsOutside
    removeTags < RTE.default.removeTags
    removeTagsAndContents < RTE.default.removeTagsAndContents

    tags >
    tags {
        br.allowedAttribs = class, style, clear
    }
}

HTMLparser_db {
    # Strip all attributes from these tags
    noAttrib =
}

inlineStyle >
classesParagraph >
classesTable >
classesTD >
classesLinks >
classesCharacter >
classesAnchor >

FE >
FE < RTE.default
}

# Remove link images
classesAnchor >
classes >

config.tt_content.bodytext.proc < RTE.default.proc
}

mod.xMOD_alt_doc {
    disableDocSelector = 1
    disableCacheSelector = 1
}

TCEFORM.pages {
    # MLC set 0 to 1 to turn off page item
    layout.disabled = 0
    lastUpdated.disabled = 0
    newUntil.disabled = 0

    target.disabled = 0
    no_cache.disabled = 0
}

```

```

cache_timeout.disabled = 0

abstract.disabled = 0
keywords.disabled = 0
author.disabled = 0
email.disabled = 0
description.disabled = 0

fe_login_mode.disabled = 0
module.disabled = 0
}

TCEFORM.tt_content {
  header_layout.altLabels.1 = Heading 1
  header_layout.altLabels.2 = Heading 2
  header_layout.altLabels.3 = Heading 3
  header_layout.altLabels.4 = Heading 4
  header_layout.altLabels.5 = Heading 5

  # MLC example for adding and remove header_layout items
  # header_layout.removeItems = 100
  # header_layout.addItems.6 = Heading 6
  # header_layout.addItems.99 = Hidden

  # MLC example to remove various content types
  # CType.removeItems = bullets,login,div,splash

  sys_language_uid.disabled = 0
  colPos.disabled = 0
  section_frame.disabled = 0
  spaceBefore.disabled = 1
  spaceAfter.disabled = 1
}

# This can allow you to have the cache for additional pages cleared when
# saving to some page or branch of the page tree.
# @ref http://typo3.org/documentation/document-library/doc\_core\_tsconfig/gt\_TCEMAIN/

TCEMAIN.clearCacheCmd = all
mod.SHARED.colPos_list = 0,2
TCEFORM.tt_content.colPos.removeItems = 1,3,10

```

## Zen Wireframe 2.1 Business Edition

Original Author: Gregory D. Remington

Email: [support\(at\)mediatech.net](mailto:support@mediatech.net)

Website: <http://www.mediatech.net>

License: <http://creativecommons.org/licenses/by-sa/3.0/>